

SEGS12B10, SEGS24B10, SEGS48B10, SEGS23B10

Single Low Intensity Obstruction Light



PHOTOMETRIC STANDARD COMPLIANCE!

ICAO ANNEX 14, VOLUME I;
TYPE A - LOW INTENSITY OBSTACLE LIGHT;
CAP 168 – LOW INTENSITY GROUP A.


KEY FEATURES & BENEFITS!

- designed and manufactured in Italy by Clampco Sistemi
- resistance to corrosion
- easy way for mounting – plug 'n' play connection
- the lowest weight and power consumption in the market
- wide range power supply: 12, 24, 48 Vdc and 110-230 Vac
- horizontal as well as vertical fixing

SPECIFICATIONS

	SEGS12B10	SEGS24B10	SEGS48B10	SEGS23B10
Order Code				
Typical use	Night time			
Light source	LED			
Type of beacon	Steady			
Colour	Red according to CIE Chromaticity Boundary			
Light Intensity	>10 cd			
Horizontal coverage	360°			
Input voltage	12 Vdc	24 Vdc	48 Vdc	110 – 230 Vac
Power consumption	3 W	3 W	3 W	4 W
Average life	100 000 hours			
Temperature range	from -40 °C to +55 °C			
Protection degree	IP66			
Material of the body	Glass Reinforced Plastic red body (UL94-HB)			
Material of the transparent cap	Polycarbonate (UL94-V2)			
Connection	M/F connector IP68 for cable up to Ø9-6 mm			
Weight	550 g			
Fixing	Stainless steel anchor basement for poles with diameter up to 82 mm.			
Optional fixing SCSG_HDGS	Mounting hardware for "L" shaped sections (50x50 mm min.; 160x160 mm max.); circular profiles (min. Ø = 48,3 mm; max. Ø 219.1 mm). Adjustable fixing plate (± 60° on the horizontal plan).			

TECHNICAL DRAWINGS

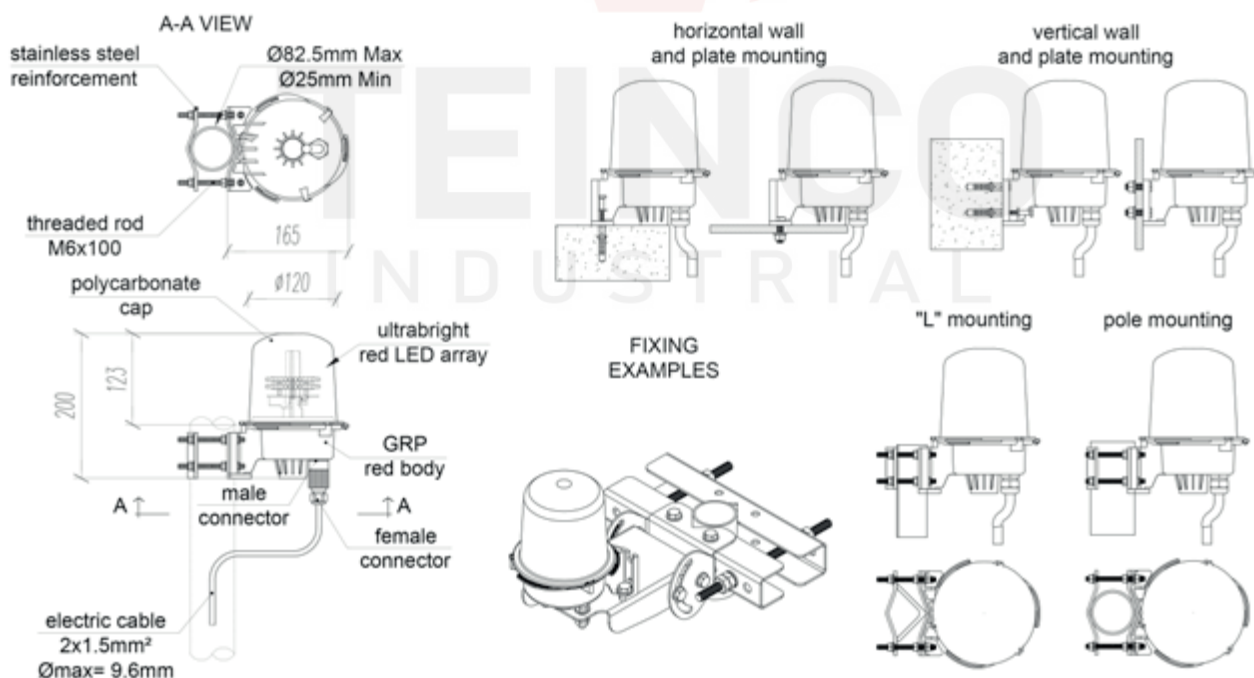

Clampco Sistemi reserves the right to make changes at any time in order to supply the best product possible.