


Frame Filter Z-LINE Coarse 45%



Similar to picture

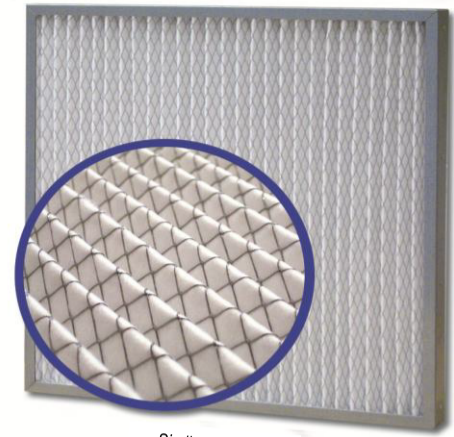

Filter class acc. to ISO 16890	ISO Coarse 45%	Medium	Polyester
Filter class acc. to EN 779:2012	G4	Medium color	White <input type="checkbox"/>
		Max. humidity resistance [%]	100
		Max. temperature [°C]	80
		Fire behaviour	DIN 53438-3 (F1)
Filter media weight	250 gr/m ³	Recommended nominal air flow [Nm³/h]	8.000
Synthetic fiber	100% polyester	Filter media retention	90%
Frame	Cardboard-, plastic-, aluminium-, galvanized steel frame	Initial pressure drop [Pa]	45
Labelling	Dimension, air direction, filter class, type test	Recommended final pressure drop [Pa]	250

Available dimensions:

Dimensions [mm] <i>(width x height x depth)</i>
496 x 496 x 47
496 x 246 x 47

TEINCO INDUSTRIAL

